

## Dual band sub 1GHz and 2.4GHz Radio Transceiver +20-dBm high-power amplifier

The **RC-CC1352P** module is based on Texas Instruments CC1352P component.

Operative Frequency Bands : 868MHz - 915MHz

The CC1352P device is a multiprotocol and multi-band Sub-1 GHz and 2.4-GHz wireless microcontroller (MCU) supporting Thread, Zigbee®, Bluetooth® 5.2 Low Energy, IEEE 802.15.4g, IPv6-enabled smart objects (6LoWPAN), MIOTY®, Wi-SUN®, proprietary systems.  
352KB Flash 80KB SRAM

The CC1352P device is a member of the CC26xx and CC13xx family of cost-effective, ultra-low power, 2.4-GHz and Sub-1 GHz RF devices. Very low active RF and microcontroller (MCU) current, in addition to sub-µA sleep current with up to 80KB of RAM retention, provide excellent battery lifetime and allow operation on small coin-cell batteries and in energy-harvesting applications.

The CC1352P device combines a flexible, very low-power RF transceiver with a powerful 48-MHz Arm® Cortex®-M4F CPU in a platform supporting multiple physical layers and RF standards. A dedicated Radio Controller (Arm® Cortex®-M0) handles low-level RF protocol commands that are stored in ROM or RAM, thus ensuring ultra-low power and great flexibility. The low power consumption of the CC1352P device does not come at the expense of RF performance; the CC1352P device has excellent sensitivity and robustness (selectivity and blocking performance).  
+20-dBm high-power amplifier.

Module Information :

**RC-CC1352P - XX(\*)**

2.4GHz Antenna Type  
**UA = UFL Connector**  
**SA = PCB Strap Antenna**


(\*) If not specified, the default version is with PCB strap antenna

### Applications :

- Low-Power Wireless Systems
- Smart Grid and Automatic Meter Reading
- Home and Building Automation
- Wireless Sensor Network
- 6LoWPAN systems

### Feature :

- IEEE 802.15.4g mode switch support
- Ultra Low consumption technology
- Powerful ARM Cortex
- Supported by the open platform Contiki 6LoWPAN.
- Very Small size

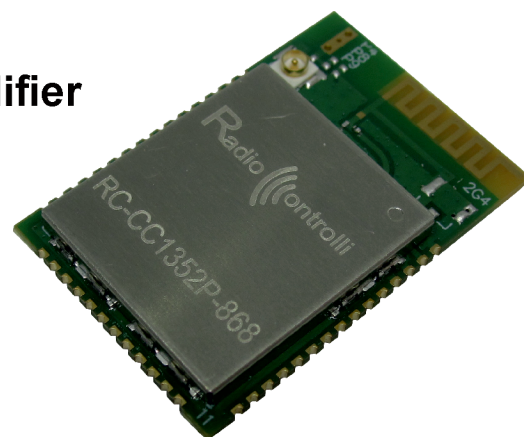

**Technical Characteristics**

Sub 1 GHz parameters	MIN	TYP	MAX	UNIT
Supply Voltage	1.8	3	3.8	VDC
Supply Current RX mode		8.5		mA
Supply Current TX mode		66		mA
Supply Current Sleep Mode		1		µA
RF Power Output 50ohm (*)			+18	dBm
Operative Frequency		868/915		MHz
RF Sensitivity 50kbps		- 110		dBm
RF Sensitivity long range mode 2.5Kbps		- 120		dBm
Data Rate (*)	0,01		4	Mbit/s
Operative Temperature	-30		+75	°C

(\*) Programmable parameter.

**MICROCONTROLLER:**


- Power ARM Cortex - M4F processor
- Up to 48MHz Clock Speed
- 352Kb of On-System Programming Flash
- 256KB of ROM for Protocol and Firmware
- 8KB of SRAM for Cache (or as General-Purpose RAM)
- 80KB of Ultralow Leakage SRAM
- Support Over-the-Air Upgrade (OTA)

**Technical Characteristics**


2.4 Ghz parameters	MIN	TYP	MAX	UNIT
Supply Voltage	1.8	3	3.8	VDC
Supply Current RX mode		8.5		mA
Supply Current TX mode		13		mA
Supply Current Sleep Mode		0.1		µA
TX Power			3	dBm

For more information and details, please refer to the CC1352P Texas Instruments datasheet.

## Reference Schematics

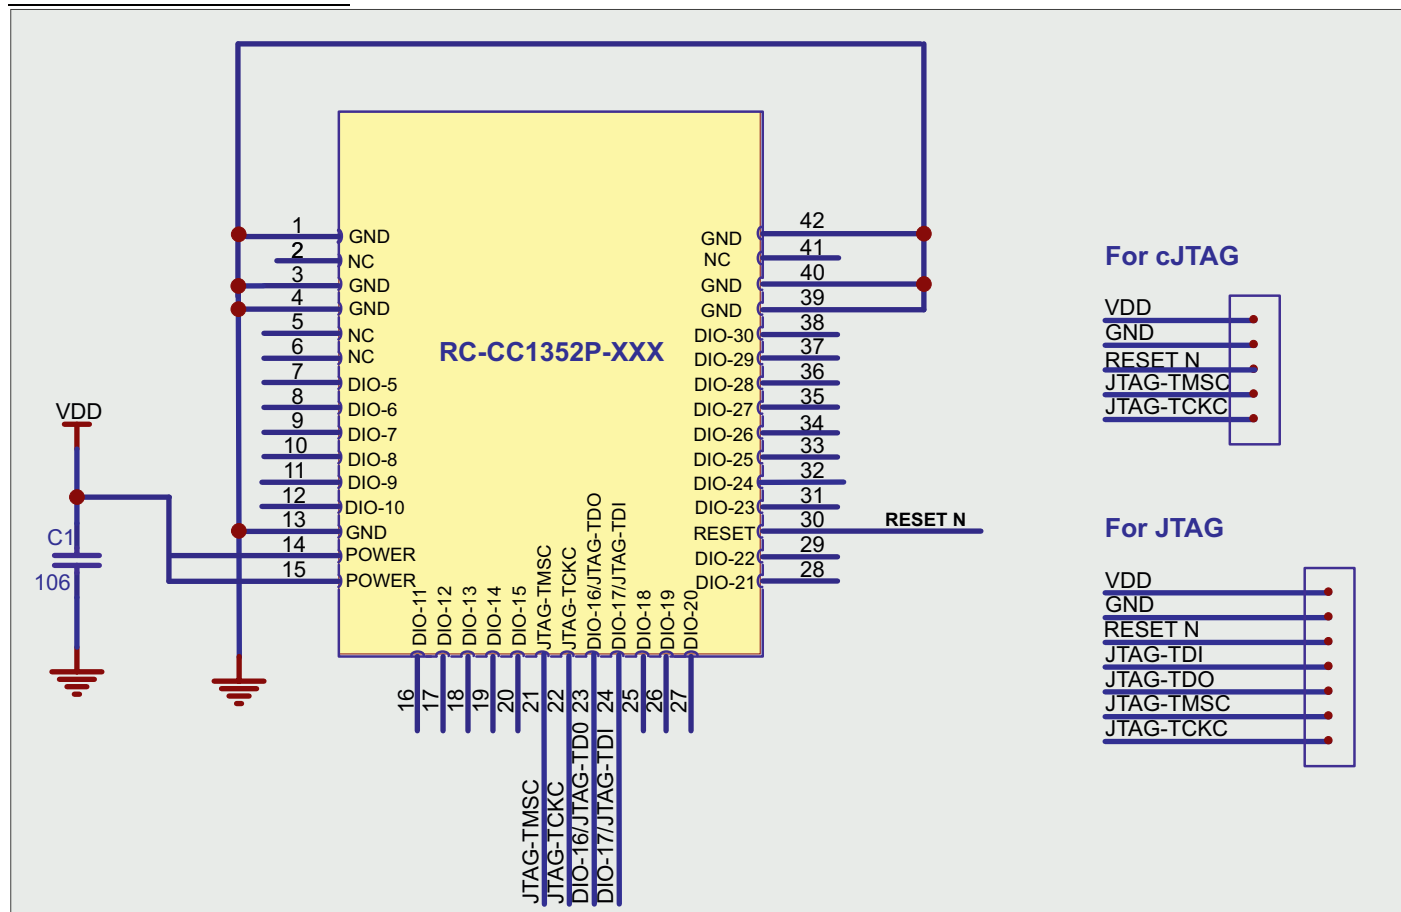


## Mechanical dimensions

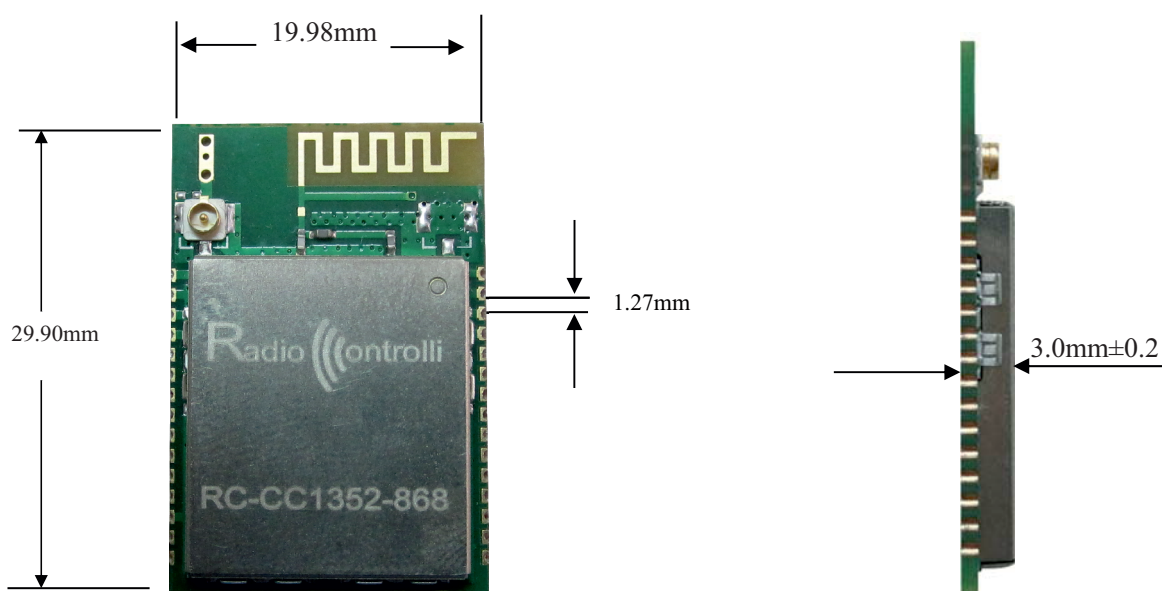


**Terminal description RC-CC1352P-XXX**

Pads	Name	Description
1	GND	Ground
2	NC	Not Connected
3	GND	Ground
4	GND	Ground
5	NC	Not Connected
6	NC	Not Connected
7	DIO-5	GPIO, Sensor Controller, High drive capability
8	DIO-6	GPIO, Sensor Controller, High drive capability
9	DIO-7	GPIO, Sensor Controller, High drive capability
10	DIO-8	GPIO Digital
11	DIO-9	GPIO Digital
12	DIO-10	GPIO Digital
13	GND	Ground
14	VDD	Power
15	VDD	Power
16	DIO-11	GPIO Digital
17	DIO-12	GPIO Digital
18	DIO-13	GPIO Digital
19	DIO-14	GPIO Digital
20	DIO-15	GPIO Digital
21	JTAG-TMSC	JTAG TMS, High drive capability
22	JTAG-TCKC	JTAG TCK
23	DIO-16	GPIO, JTAG -TDO, High drive capability
24	DIO-17	GPIO, JTAG-TDI, High drive capability
25	DIO-18	GPIO Digital
26	DIO-19	GPIO Digital
27	DIO-20	GPIO Digital
28	DIO-21	GPIO Digital
29	DIO-22	GPIO Digital
30	RESET-N	RESET, (Active low ,No internal pull up)
31	DIO-23	GPIO Digital
32	DIO-24	GPIO, Sensor Controller, Analog
33	DIO-25	GPIO, Sensor Controller, Analog
34	DIO-26	GPIO, Sensor Controller, Analog
35	DIO-27	GPIO, Sensor Controller, Analog
36	DIO-28	GPIO, Sensor Controller, Analog
37	DIO-29	GPIO, Sensor Controller, Analog
38	DIO-30	GPIO, Sensor Controller, Analog
39	GND	Ground
40	GND	Ground
41	NC	Not Connected
42	GND	Ground

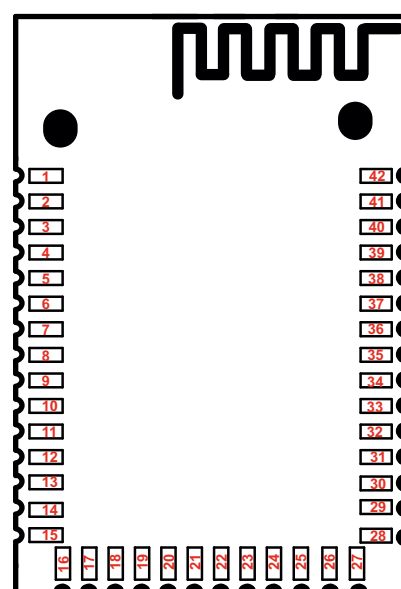*Pin out device*

## Rev 1.2

### Recommended PCB Layout

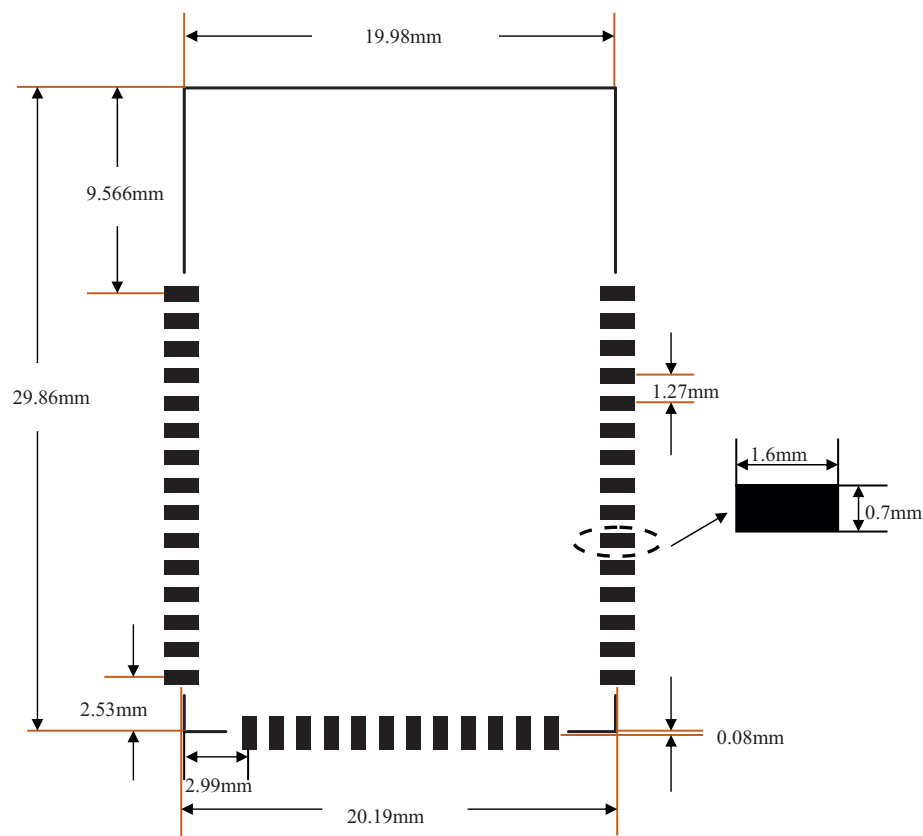

### Recommended Reflow Profile for Lead Free Solder

